

PB11 Series 2.54mm(.100") Pin Header

- ⊙ With locking wall
- ⊙ Mates with PB11 housing





Construction

Insulator: Nylon 66 UL 94V-2, Color Ivory


- ⊙ With Tin plated 0.64mm square pin
- Engineering No's: CI31/2531 Series



AI AI:E159616

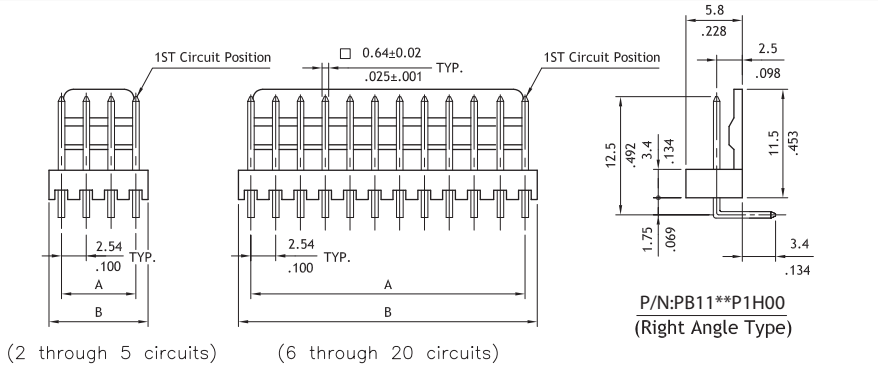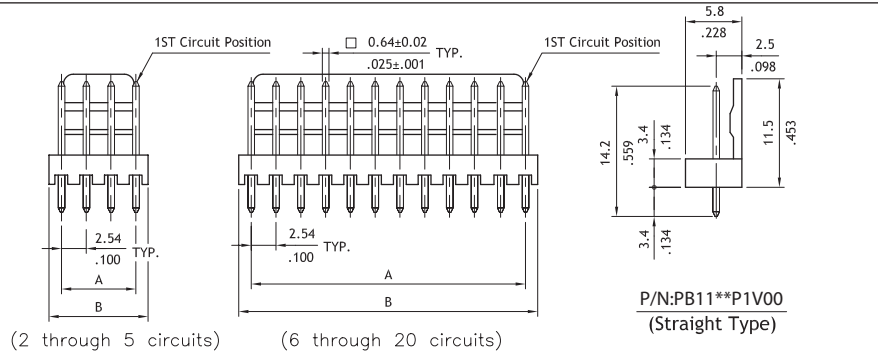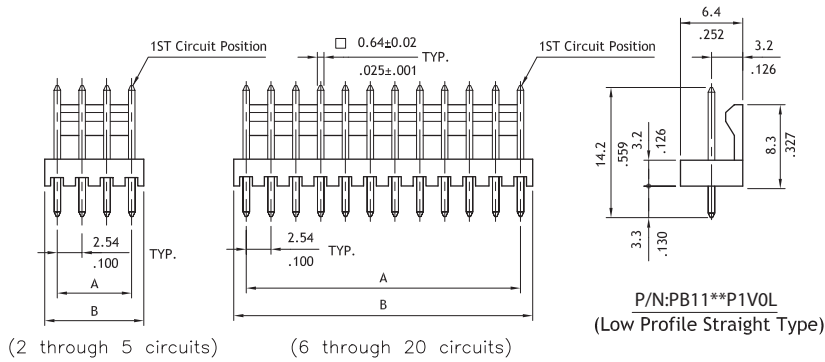

| Circuits | Dimension | |
|----------|--------------|-------------|
| | A | B |
| 2 | 2.54(.100) | 5.1(.200) |
| 3 | 5.08(.200) | 7.6(.300) |
| 4 | 7.62(.300) | 10.2(.400) |
| 5 | 10.16(.400) | 12.7(.500) |
| 6 | 12.70(.500) | 15.2(.600) |
| 7 | 15.24(.600) | 17.9(.700) |
| 8 | 17.78(.700) | 20.3(.800) |
| 9 | 20.32(.800) | 22.9(.900) |
| 10 | 22.86(.900) | 25.4(1.000) |
| 11 | 25.40(1.000) | 27.9(1.100) |
| 12 | 27.94(1.100) | 30.5(1.200) |
| 13 | 30.48(1.200) | 33.0(1.300) |
| 14 | 33.02(1.300) | 35.6(1.400) |
| 15 | 35.56(1.400) | 38.1(1.500) |
| 16 | 38.10(1.500) | 40.6(1.600) |
| 17 | 40.64(1.600) | 43.2(1.700) |
| 18 | 43.18(1.700) | 45.7(1.800) |
| 19 | 45.72(1.800) | 48.3(1.900) |
| 20 | 48.26(1.900) | 50.8(2.000) |



Recommended P.C. Board Layout

